


X-Lite Phone configuration for Fit IP PBX

1. Click the Menu button of X-lite phone and then select SIP Account Settings:




2. Click [Add] to enter SIP Account Settings

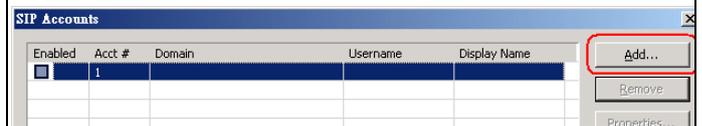


3. Enter the Account Settings Provided:

- Display Name: <your_name>
- User Name: <your_user_name>
- Password: <your_password>
- Authorization user name: <user_name>
- Domain: uc.fit.com.hk

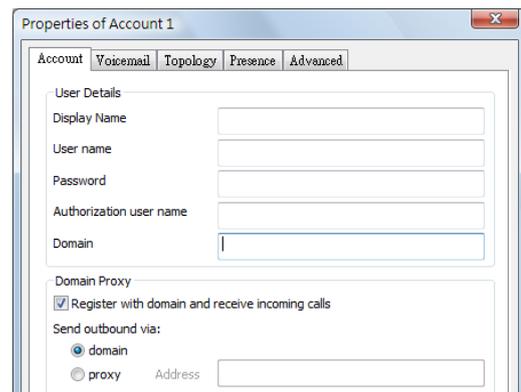


4. Select Voicemail and enter voicemail settings:
- Tick the [Check for Voice Mail check box]
 - Number to dial for check voicemail: *97

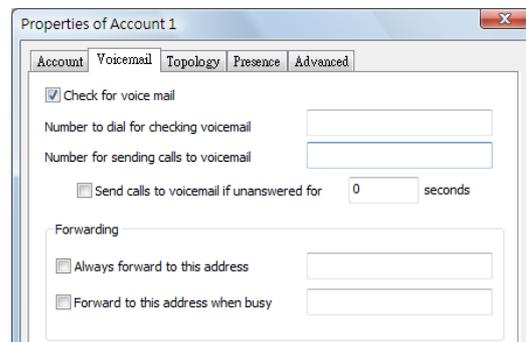

5. Dial ***7469

- Filter dtmf: set force_send_in_band=0
- Filter 2833: set 2833:enabled=0

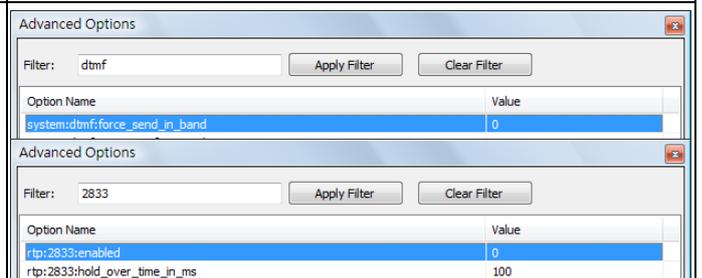

3CXPhone configuration for Fit IP PBX

1. Click the Menu button at the bottom of the phone; and then
2. Click [Connection] icon to enter SIP Account Settings



3. Enter Connection Settings:
 - Enter a Profile name
 - Extension: (your extension no.)
 - ID: (your extension no.)
 - Password: (your extension password)
 - Local IP: uc.fit.com.hk

And then click [Advanced settings]

Connection settings

Profile: [dropdown] [New] [Delete]

Credentials
Enter your SIP account credentials
Extension: [text]
ID: [text]
Password: [text]

My location
Specify the IP of your PBX/SIP server
 I am in the office - local IP [text] of PBX
 I am out of the office - external IP [text] of PBX

Use 3CX Tunnel
Eliminates firewall configuration. Requires 3CX Phone System for Windows
Local IP of remote PBX: [text]
Tunnel password: [text] Port: 5090

Use Outbound Proxy server
Required by some VoIP Providers. Specify IP or name. [text]

[Advanced settings] [OK] [Cancel]

4. At advanced setting, configure as below:
 - PBX voicemail: *97
 - Uncheck: [Support RFC2833 DTMF]
 - Uncheck: [Support INBAND DTMF]
 - Select [SIPINFO DTMF]
 - Move PCMA to top

Advanced settings

Interface: [127.0.0.1]
Local port: [5070] [Any]
PBX port: [5060] [Default]
PBX voicemail: [*97]
RTP ports: [40000] [40019]
STUN server: [text]
Registration time: [1] minutes
SIP transport: [UDP] [Certificates]
RTP mode: [Normal]
Codecs: [PCMA] [Up] [Down]
 Support RFC2833 DTMF
Payload number: [101]
 Support INBAND DTMF
 Support SIPINFO DTMF

[OK] [Cancel]